



warehouse

SALE

OP = OP

Werklampen | NORDIC LIGHTS

64 stuks

NO-910-060B

N100D 24V 70W WF BlInDeutsch Damp TT

Zie meer info op pagina 2

Prijslijst € 61,50

Nú € 25,00

Korting 60%

[Bestel per mail](#)

23 stuks

NO-905-001

N100D 12V 55W

Prijslijst € 31,25

Nú € 15,00

Korting 52%

[Bestel per mail](#)

10 stuks

NO-983-201

Cue signal light 24V

Prijslijst € 129,00

Nú € 59,00

Korting 54%

[Bekijk/bestel in onze webshop](#)

32 stuks

NO-988-102B

Canis Go 410 12/24V 16W Flood 1000LM

Zie meer info op pagina 4

Prijslijst € 72,00

Nú € 35,00

Korting 51%

[Bestel per mail](#)

20 stuks

NO-985-138

Virgo N3104 LED 12-24V 40W LoBeam

Prijslijst € 210,00

Nú € 119,00

Korting 43%

[Bekijk/bestel in onze webshop](#)

Waarschuwingsverlichting

26 stuks

VA-EB7181

BEACON LED square R65 12-24V Amber

Prijslijst € 180

Nú € 99,00

Korting 45%

[Bekijk/bestel in onze webshop](#)

10 stuks

VA-ED3706A

LED flitser R65 12-24V Oranje

Prijslijst € 110,00

Nú € 49,00

Korting 55%

[Bekijk/bestel in onze webshop](#)

10 stuks

VA-ED3801W

LED flitser ECE R10/R65 12-24V 6led WIT

Prijslijst € 117,00

Nú € 54,00

Korting 54%

[Bekijk/bestel in onze webshop](#)

ENKEL MET WIT LICHT TE KOOP

N100 HALOGEN D

NORDIC LIGHTS® N100 Halogen D work light is suitable for locations requiring wide illumination. This work light is equipped with the HD dampening system and is suitable for vertical or pendant mounting by rotating the light unit. The N100 Halogen D runs like clockwork from dusk to dawn.




Not all products are available in all markets. During continuous improvement specifications and design are changing. All values are nominal values. Illustrations do not necessarily show the design of every version and some features are version specific. The lumens output varies depending on lens colour.

TECHNICAL DATA


Theoretical Lumens Output 12V, 24V	1450 lm 1750 lm	Mount	Single Bolt M10, Single Bolt M8
Operational Lumens Output 12V, 24V	1100 lm 1400 lm	Vibration	8.57Grms 18-600Hz
Colour Temperature	3200 K	Lens	Hardened Glass
Nominal Voltage DC	12 V 24 V 36 V 48 V 80 V	Body / Housing	Polyamide
Input Voltage DC	8 - 16 V 16 - 32 V 28 - 44 V 33 - 68 V 56 - 110 V	Weight	0.5 kg
Bulb	H3	IP Rating	IP67 (not Grommet)
Power Consumption	12V: 55W, 24V HD Bulb: 65W, 24V: 70W	Salt Spray Test	ISO 9227 240H
Nominal Current at	12V=4.6A, 24V=2.7A, 36V=2.0A, 48V=1.4A,	Operating Temperatures	-40°C... +85°C

LIGHT PATTERNS



**N100 Halogen SP
Wide Flood**

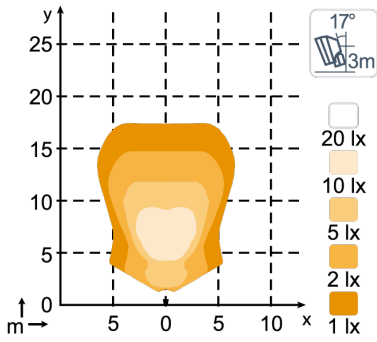

**N100 Halogen SP
Flood**

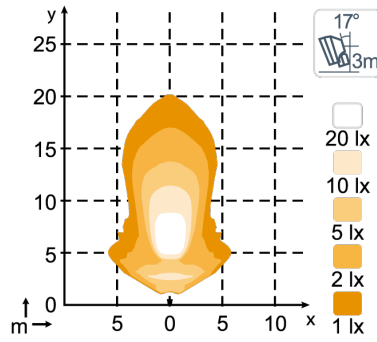

DRAWINGS

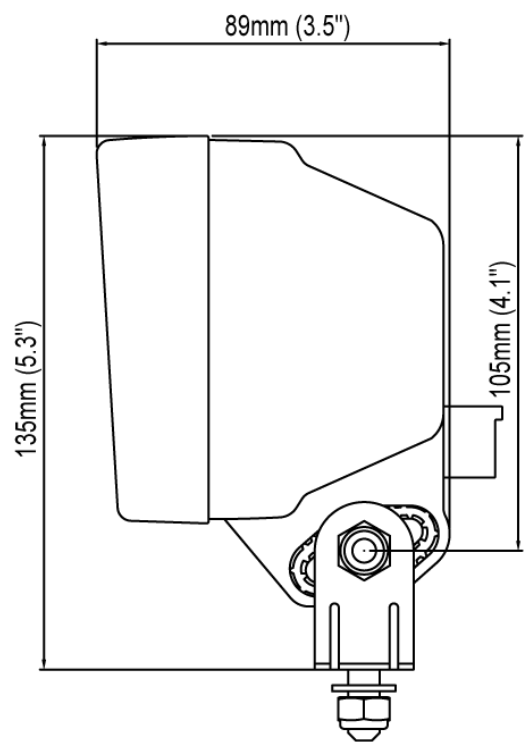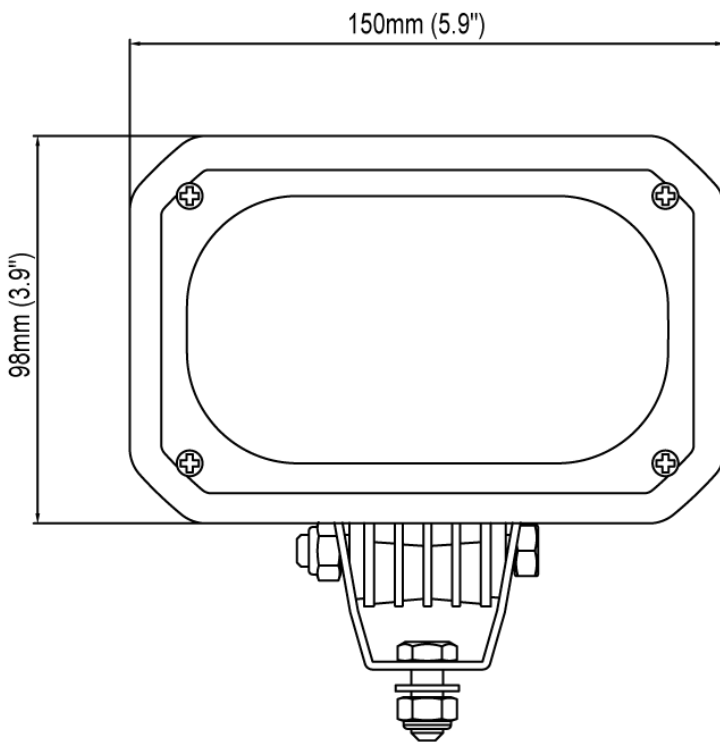

CANIS GO 410

Our entry-level Canis GO 410 is as good as it gets. While it is lighter in weight than the original Canis work light, the operational lumens output is just as high. Best suited to construction, forestry, agriculture, and material handling, the Canis GO 410 has a round form factor and pedestal mounting, it produces zero emissions (EMC CISPR 25 class 5) and its light output is 1000 lumens.



Not all products are available in all markets. During continuous improvement specifications and design are changing. All values are nominal values. Illustrations do not necessarily show the design of every version and some features are version specific. The lumens output varies depending on lens colour.

TECHNICAL DATA

Theoretical Lumens Output	1600 lm	Vibration	8Grms 24-2000Hz
Operational Lumens Output	1000 lm	Lens	Grilamid® (registered trademark of EMS-GRIVORY)
Colour Temperature	5000 K	Body / Housing	Aluminium
Nominal Voltage DC	12 - 24 V 36 - 48 V	Weight	0.5 kg
Input Voltage DC	9 - 16 V 18 - 32 V 30 - 64 V	IP Rating	IP68, IP6K9K
Power Consumption	16 W 18 W	Salt Spray Test	ISO 9227 240H
Nominal Current at	12V=1.05A, 24V=0.6A, 36-48V=0.38A	EMC	CISPR 25 Class 5, EN12895, ISO 13766, ISO 14982, ISO 7637-2
Connector	Built-in Deutsch DT-2 (2-pin)	Electronics	Isolated
Mount	Single Bolt M8	Operating Temperatures	-40°C... +85°C (Overheat protected)
Shock	60G	Part Numbers	Wide Flood: 988-101B, Flood: 988-102B

CONNECTORS




Built-in Deutsch DT-2 (2-pin)

KEY FEATURES


- Dimmable & Cost-effective all-rounder
- Operational lumens output: 1000lm
- Pure performance in a compact design

LIGHT PATTERNS

**Canis GO 410, 1000lm
Wide Flood**

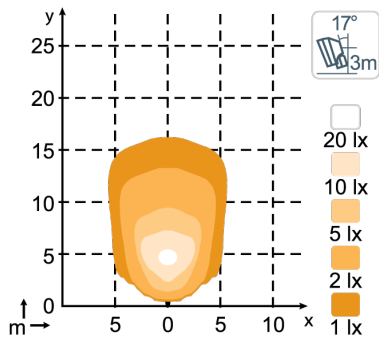

**Canis GO 410, 1000lm
Flood**

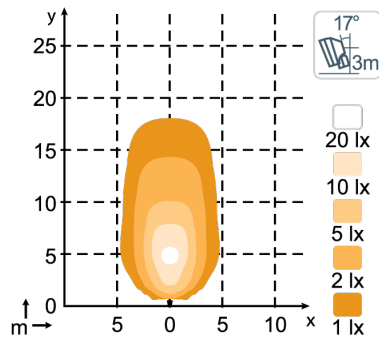

DRAWINGS

